





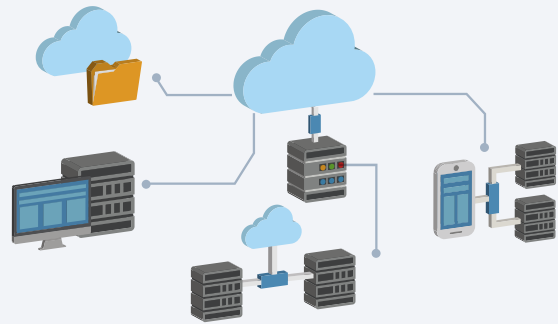
Wall Mount System



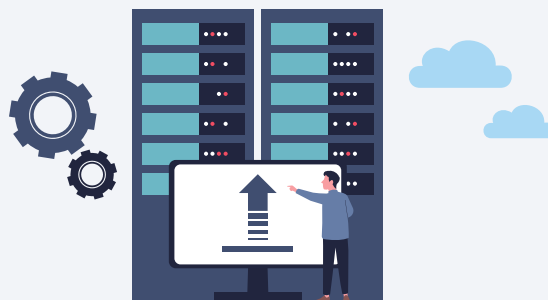


Model		BC-K300
QR Code		
Pictures		 
Mounting Type		Wall Mount
Dimensions (W x H x D) mm		277 x 136 x 315.5
CPU Support		Intel® 10th Gen. Core™ / Pentium® / Celeron® / Xeon® W-1200 CPU
Chipset		Intel® W480E / Q470E / H420E
Max. System Memory		128GB
Drive Bay		2 x 2.5" SSD/HDD (SATA 3.0)
Display		1 x VGA 2 x DP
Audio		Mic In / Line In / Line Out
I / O P O R T S	Serial Ports	2
	Parallel Port	—
	LAN	2
	USB	2 x USB 3.2 2 x USB 3.0 4 x USB 2.0
Expansion Slots		1 x PCIe (x16) 2 x PCIe (x4) 1 x PCIe (x1)
Power Requirement		ATX
O.S. Support		Windows 10 IoT LTSC 64bit / Windows 11 IoT Enterprise (GAC)
Operating Temperature		0°C~40°C
Certifications		CE, FCC

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Rack Mount System







Model		BC-K100	BC-K201	BC-2602
QR Code				
Pictures				
Mounting Type		1U Rack mount	2U Rack mount	4U Rack mount
Dimensions (W x H x D) mm		482 x 45 x 250	428.2 x 88 x 310	430 x 177 x 330
CPU Support		Intel® Celeron® J6412, Atom® X6425RE	Intel® 10th Gen. Core™ / Pentium® / Celeron® / Xeon® W-1200 CPU	Intel® 9th / 8th Xeon® / Core™ / Pentium® / Celeron® CPU (socket: LGA1151) (≤ 65W)
Chipset		--	Intel® W480E / Q470E / H420E	Intel® Q370 / H310 / C246
Max. System Memory		32GB	128GB	64GB
Drive Bay		1 x 2.5" SSD/HDD (SATA 3.0)	2 x 2.5" SSD/HDD (SATA 3.0) or 1 x 3.5" HDD (SATA 3.0)	3.5" x 4 (SATA 3.0) 2.5" x 2 (optional)
Display		1 x HDMI® 1 x DP	VGA 2 x DP	VGA 2 x DP
Audio		Line Out	Mic In / Line In / Line Out	Mic In / Line In / Line Out
I / O P O R T S	Serial Ports	2	2	2
	Parallel Port	--	--	--
	LAN	2	2	2
	USB	8	2 x USB 3.1 2 x USB 3.0 2 x USB 2.0	2 x USB 3.2 2 x USB 3.0 4 x USB 2.0
Expansion Slots		1 x M.2 (2280) NVMe 1 x mini PCIe	1 x PCIe (x16) 2 x PCIe (x4) 1 x PCIe (x1)	1 x PCIe (x16) 3 x PCIe (x4) 1 x PCIe (x1) 2 x PCI 1 x mini PCIe 1 x M.2 (2242) NVMe
Power Requirement		DC In 12V/24V	ATX	ATX
O.S. Support		Windows 10 64bit / Ubuntu 20.04 (kernel: 5.4) / Windows 11 IoT Enterprise (GAC)	Windows 10 IoT LTSC 64bit / Windows 11 IoT Enterprise (GAC)	Windows 10 IoT LTSC 64bit
Operating Temperature		0°C~40°C	0°C~40°C	0°C~40°C
Certifications		CE, FCC	CE, FCC	CE, FCC

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Industrial Box PC



Model		BC-K600	SA-N718
QR Code			
Pictures			
Mounting Type		Box PC	Box PC
Dimensions (W x H x D) mm		200 x 145 x 200	300 x 94 x 270
CPU Support		Intel® 12th Gen. & 13th Gen. & 14th Gen. Core™ / Pentium® / Celeron®	Intel® 10th Gen. Core™ / Pentium® / Celeron® / Xeon® W-1200
Chipset		LGA1700	Intel® W480E / Q470E / H420E
Max. System Memory		64GB	64GB DDR4
Drive Bay		2 x 2.5" SSD/HDD (SATA 3.0)	2 x 2.5" SSD/HDD (SATA 3.0)
Display		1 x DVI-D + 1 x HDMI® + 1 x DP	2 x DVI-D
Audio		Mic In / Line In / Line Out	Mic In / Line In / Line Out
I / O P O R T S	Serial Ports	2	2
	Parallel Port	--	--
	LAN	2	2
	USB	4 x USB 3.0 2 x USB 2.0	4 x USB 3.0 4 x USB 2.0
Expansion Slots		1 x PCIe (x16) 1 x mini PCIe 1 x M.2 (2242) SATA 1 x M.2 (2230) E-key	1 x PCIe (x16) 1 x M.2 (2242) NVMe
Power Requirement		DC in 12V~24V	ATX
O.S. Support		Windows 10 IoT LTSC 64bit / Windows 11 IoT Enterprise (GAC)	Windows 10 IoT LTSC 64bit / Windows 11 IoT Enterprise (GAC)
Operating Temperature		0°C~40°C	0°C~40°C
Certifications		CE, FCC	CE, FCC

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.